

Vended  
**Galaxy 600**  
Washer-Extractors



## GREAT MINDS THINK ALIKE: GALAXY™ 600 WASHER-EXTRACTORS

At Huebsch, our priority is making commercial laundry equipment that's perfectly aligned with your business philosophy. In other words, because you believe that profit is the inevitable result of superior efficiency, durability, simplicity and service, that's exactly what we deliver.

What's more, we deliver it in every facet of our products...

### GALAXY 600 CONTROLS

Designed to improve your bottom line



#### A variety of cycle selections

Six cycle selections and multilevel pricing mean more opportunity for profit, while time-of-day pricing helps increase turns during slow times.

#### Extra wash and rinse keys

These options enable customers to tailor wash cycles - at premium vend prices.

#### Infrared communication

In the past, programming 10 machines could take as long as an hour. With the Galaxy infrared communication port and easy programming, owners with a PDA or PC can do it in less than 10 minutes. Time saved = money saved.

## HUEBSCH COMMAND™

Laundromat data and analytics that are custom-made for the way you operate

The Galaxy™ 600\* Washer-Extractor is Huebsch Command-compatible! That means you get all features of the Galaxy control—but now you can use them remotely, from anywhere in the world with an internet connection!



MULTILEVEL VEND PRICING CHANGES



ADVANCED PERFORMANCE DATA



REMOTE START AND SYSTEM MONITORING



SET TIME-OF-DAY/ DAY-OF-WEEK PRICING



SERVICE ALERTS VIA EMAIL OR TEXT



CONFIGURE MACHINES FROM THE CLOUD




TURNS PER DAY



100% SUPPORTED BY HUEBSCH

# Vended Galaxy™ 600 Washer-Extractors specifications

MODELS	HC020	HC030	HC040	HC060	HC080
Control Option	Galaxy™ 600				
Capacity (kg)	9	13.6	18	27	36
Volume (L)	79.3	118.9	178.4	254.9	365.3
Drum Diameter (mm)	533	610	667	762	914
Door Opening Size (mm)	295	364	413	413	470
Water Connection	2x 19mm	2x 19mm	2x 19mm	2x 19mm	2x 19mm
Recommended Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)				
Drain Diameter (mm)	76	76	76	76	76
Motor Power Consumption (kW)	.75	7.5	1.5	2.2	3.7
Electricity Req	240V/50Hz/1ph/	240V/50Hz/1ph	240V/50Hz/1ph	240V/50Hz/1ph	240V/50Hz/1ph
Net Weight (kg)	152	209	249	315	549
Dimensions (mm)	660w x 784d x 1092h	737w x 896d x 1143h	778w x 1073d x 1199h	865w x 1135d x 1267h	1054w x 1234d x 1427h
Foundations	Minimum 100mm M20 Grade Concrete Foundation				

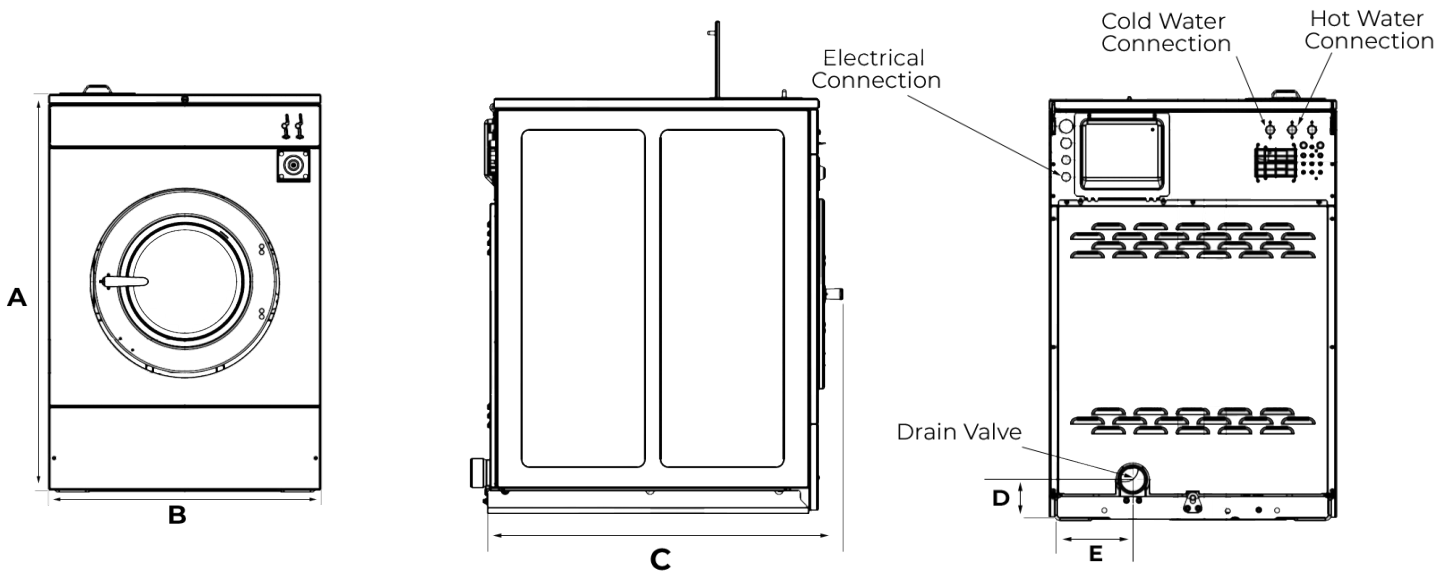

MODELS	HC020	HC030	HC040	HC060	HC080
A (Height)	1092mm	1143mm	1199mm	1267mm	1427mm
B (Width)	660mm	737mm	778mm	865mm	1054mm
C (Depth)	784mm	896mm	1073mm	1135mm	1234mm
D	99mm	109mm	114mm	124mm	130mm
E	198mm	236mm	224mm	251mm	69mm